
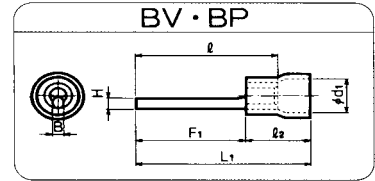
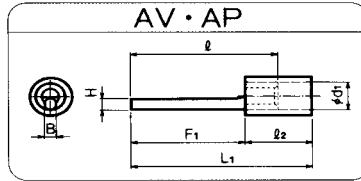


絶縁被覆付圧着端子 (AVA・APA/BVA・BPA形)



棒状形端子

	呼び		在庫	呼び		在庫	各部の寸法							標準色	適合電線範囲			適合工具	一箱入数			
	UL	SP		ビニル	SP		ナイロン	B	H	d ₁		F ₁	l ₂		l	L ₁	板厚			単線mm	撚線mm ²	AWG
									BV	BP												
ストレート形			AVA-0.3		-		1.0	1.0	2.2		10.0	9.5	14.0	19.5	0.65	黄	0.32~0.6	0.1~0.3	26-24	DS05N DH-1B AC-5N-D	1,000	
			AVA-0.5		APA-0.5									0.5	0.6~0.8		0.3~0.5	22-20				
			AVA-1.25		APA-1.25		1.7	1.7	3.3		12.7	9.5	17.0	22.2	0.8	赤	0.8 ∩ 1.44	0.5 ∩ 1.65	20-16	3号D 34号 34S DH-1B AC-5N-D	500	
			AVA-1.25N		APA-1.25N		1.3	1.3	3.3		13.2		17.5	22.7								
			AVA-1.25L		APA-1.25L		1.6	1.4	3.3		17.0		21.3	26.5								
			AVA-1.25LB		APA-1.25LB		1.7	1.7	3.3		17.0	21.3	26.5									
			AVA-2		APA-2		1.6	1.6	3.9		12.7	9.5	17.0	22.2	0.8	青	1.14 ∩ 1.82	1.04 ∩ 2.63	16-14	4号D 34号 34S DH-1B AC-5N-D	500	
			AVA-2L		APA-2L			1.4	3.9		17.0		21.3	26.5								
			AVA-2LB		APA-2LB		1.7	1.7	3.9		17.0	21.3	26.5									
			AVA-5.5		APA-5.5		2.0	2.0	5.4		14.7	14.0	21.0	28.7	1.0	黄	1.82 ∩ 2.89	2.63 ∩ 6.64	12-10	5号 DH-1B AC-5N-D	300	
		AVA-5.5L		APA-5.5L		5.4			19.5	25.8	33.5											
		AVA-5.5LL		APA-5.5LL		5.4			24.0	30.3	38.0											
拡管形			BVA-0.3		-		1.0	1.0	3.2		10.0	9.0	14.0	19.0	0.65	黄	0.32~0.6	0.1~0.3	26-24	DS05N DH-1B AC-5N-D	1,000	
			BVA-0.5		-									0.5	0.6~0.8		0.3~0.5	22-20				
			BVA-1.25		BPA-1.25		1.7	1.7	4.1		12.7	9.0	17.0	21.7	0.8	赤	0.8 ∩ 1.44	0.5 ∩ 1.65	20-16	3号D 34号 34S DH-1B AC-5N-D	500	
			BVA-1.25N		BPA-1.25N		1.3	1.3	4.1		13.2		17.5	22.2								
			BVA-1.25L		BPA-1.25L		1.6	1.4	4.1		17.0		21.3	26.0								
			BVA-1.25LB		BPA-1.25LB		1.7	1.7	4.1		17.0	21.3	26.0									
			BVA-2		BPA-2		1.6	1.6	4.7		12.7	9.0	17.0	21.7	0.8	青	1.14 ∩ 1.82	1.04 ∩ 2.63	16-14	3号D 34号 34S DH-1B AC-5N-D	500	
			BVA-2L		BPA-2L			1.4	4.7		17.0		21.3	26.0								
			BVA-2LB		BPA-2LB		1.7	1.7	4.7		17.0	21.3	26.0									
			BVA-5.5		-		2.0	2.0	6.4		14.7	13.5	21.0	28.2	1.0	黄	1.82 ∩ 2.89	2.63 ∩ 6.64	12-10	5号 DH-1B AC-5N-D	300	
		BVA-5.5L		-		6.4			19.5	25.8	33.0											
		BVA-5.5LL		-		6.4			24.0	30.3	37.5											

1. 各呼びの印は、UL登録品、CSA登録品です。
2. UL登録品又は、CSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA品用となります。

棒状形端子は通常の電流よりも60%~70%位の目安でご使用ください。