
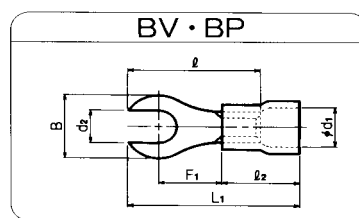




絶縁被覆付圧着端子 AV(RF・HY)AP(RF・HY)形 BV(RF・HY)BP(RF・HY)形

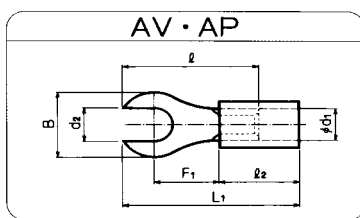

丸先開形端子

	呼び		在庫	呼び		在庫	各部の寸法							標準色	適合電線範囲			適合工具	一箱入数			
	UL	SP		ピニル	ナイロン		d ₂	B	d ₁	F ₁	l ₂	l	L ₁		板厚	単線mm	撚線mm ²			AWG		
ストレート形			AVRF1.25-3		APRF1.25-3		3.2	5.5		4.8		11.7	16.7	0.8	赤	0.8 1.44	0.5 1.65	20-16	3号D 34S DH-1B AC-5N-D	1,000		
			AVRF1.25-3.5		APRF1.25-3.5		3.7				11.4	16.4										
			AVRF1.25-S4		APRF1.25-S4		4.3	6.8	3.3	5.9	9.5	13.3	18.3									
			AVRF1.25-4		APRF1.25-4					7.5		15.3	20.3									
			AVRF1.25-5		APRF1.25-5		5.3	8.0				14.5	19.5									
			AVRF2-M3		APRF2-M3		3.2	5.5		5.1		11.7	16.7									
			AVRF2-3		APRF2-3			6.5	3.9	9.5		12.3	17.3									
			AVRF2-4		APRF2-4		4.3	8.5				8.2									16.3	21.3
			AVRF2-5		APRF2-5		5.3	9.5				8.6									16.6	21.6
		AVRF5.5-4		APRF5.5-4		4.3	9.5	5.4	8.8	14.0	19.2	26.9	1.0	黄	1.82 2.89	2.63 6.64	12-10	5号 DH-1B AC-5N-D	400			
		AVRF5.5-5		APRF5.5-5		5.3					18.9	26.6										
拡管形			BVRF1.25-3		BPRF1.25-3		3.2	5.5		4.8		11.7	16.2	0.8	赤	0.8 1.44	0.5 1.65	20-16	3号D 34号 34S DH-1B AC-5N-D	1,000		
			BVRF1.25-3.5		BPRF1.25-3.5		3.7				11.4	15.9										
			BVRF1.25-S4		BPRF1.25-S4		4.3	6.8	4.1 (4.0)	5.9	9.0	13.3	17.8									
			BVRF1.25-4		BPRF1.25-4					7.5		15.3	19.8									
			BVRF1.25-5		BPRF1.25-5		5.3	8.0				14.5	19.0									
			BVRF2-M3		BPRF2-M3		3.2	5.5		5.1		11.7	16.2									
			BVRF2-3		BPRF2-3			6.5	4.7 (4.5)	9.0		12.3	16.8									
			BVRF2-4		BPRF2-4		4.3	8.5				8.2									16.3	20.8
			BVRF2-5		BPRF2-5		5.3	9.5				8.6									16.6	21.1
		BVRF5.5-4		-		4.3	9.5	6.4	8.8	13.5	19.2	26.4	1.0	黄	1.82 2.89	2.63 6.64	12-10	5号 DH-1B AC-5N-D	400			
		BVRF5.5-5		-		5.3					18.9	26.1										

1. 各呼びの印は、UL登録品、CSA登録品です。
2. UL登録品又はCSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA品用となります。
3. ()はBPRF形の寸法です。



横開形端子

	呼び		在庫	呼び		在庫	各部の寸法							標準色	適合電線範囲			適合工具	一箱入数	
	UL	SP		ピニル	ナイロン		d ₂	B	d ₁	F ₁	l ₂	l	L ₁		板厚	単線mm	撚線mm ²			AWG
ストレート形			AVHY1.25-3		APHY1.25-3		3.2	5.0		5.0		12.2	17.2	0.8	赤	0.8 1.44	0.5 1.65	20-16	3号D 34号,34S DH-1B AC-5N-D	1,000
			AVHY1.25-4		APHY1.25-4		4.3	7.2	3.3	7.3	9.5	15.8	20.8							
			AVHY1.25-5		APHY1.25-5		5.3	7.0												
			AVHY2-4		APHY2-4		4.3	7.8	3.9	8.3	9.5	17.0	22.0							
			AVHY2-5		APHY2-5		5.3	8.7				17.5	22.5							
拡管形			BVHY1.25-3		BPHY1.25-3		3.2	5.0		5.0		12.2	16.7	0.8	赤	0.8 1.44	0.5 1.65	20-16	3号D 34号,34S DH-1B AC-5N-D	1,000
			BVHY1.25-4		BPHY1.25-4		4.3	7.2	4.1 (4.0)	7.3	9.0	15.8	20.3							
			BVHY1.25-5		BPHY1.25-5		5.3	7.0												
			BVHY2-4		BPHY2-4		4.3	7.8	4.7 (4.5)	8.3	9.0	17.0	21.5							
			BVHY2-5		BPHY2-5		5.3	8.7				17.5	22.0							

1. 各呼びの印は、UL登録品、CSA登録品です。
2. UL登録品又はCSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA品用となります。
3. ()はBPHY形の寸法です。