
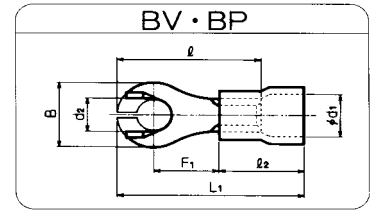
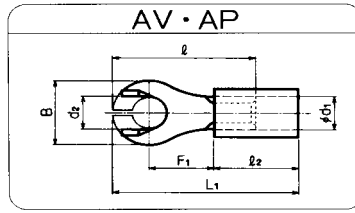


# 絶縁被覆付圧着端子 (AVYT・APYT/BVYT・BPYT形)



## インターロック形端子

	呼び		在庫	呼び		在庫	各部の寸法							標準色	適合電線範囲			適合工具	一箱入数												
	UL	SP		ビニル	SP		ナイロン	d <sub>2</sub>	B	d <sub>1</sub>	F <sub>1</sub>	l <sub>2</sub>	l		L <sub>1</sub>	板厚	単線mm			撚線mm <sup>2</sup>	AWG										
ストレート形			AVYT1-3		APYT1-3		3.2	5.8	3.3	6.6	14.1	19.1	0.8	赤	0.8 ∩ 1.44	0.5 ∩ 1.65	20-16	3号D 34号 DH-1B AC-5N-D	500												
			AVYT1-3.5		APYT1-3.5		3.7	6.5																							
			AVYT1-S4		APYT1-S4		4.3	7.5																							
			AVYT1-4		APYT1-4		8.0	9.5	15.5	20.0																					
			AVYT1-S5		APYT1-S5		5.3																								
			AVYT1-5		APYT1-5		11.5	10.0	20.2	25.2																					
			AVYT1-6		APYT1-6		6.4	3.9	5.1	9.5	12.5	17.5			0.8	青	1.14 ∩ 1.82	1.04 ∩ 2.63	16-14	43号D 34号 DH-1B AC-5N-D	500										
			AVYT2-3M		APYT2-3M		3.2															6.5									
			AVYT2-3		APYT2-3		6.0															8.3	15.6	20.6							
			AVYT2-3.5M		APYT2-3.5M		3.7															6.5	5.1	12.5	17.5						
			AVYT2-3.5		APYT2-3.5		8.3															7.5	15.6	20.6							
			AVYT2-S4		APYT2-S4		4.3																								
		AVYT2-4		APYT2-4		8.5	16.5						21.5																		
		AVYT2-5		APYT2-5		5.3	12.0						11.5	21.7			26.7														
		AVYT2-6		APYT2-6		6.4	5.4						8.8	14.0			19.5	27.2	1.0	黄	1.82 ∩ 2.89	2.63 ∩ 6.64	12-10	5号 DH-1B AC-5N-D	400						
		AVYT3-4		APYT3-4		4.3																				9.5					
		AVYT3-5		APYT3-5		5.3																				10.2	22.4	30.1			
		AVYT3-6		APYT3-6		6.4																							12.0	22.4	30.1
拡管形			BVYT1-3		BPYT1-3			3.2	5.8	4.1 (4.0)	6.6	14.1			18.6	0.8										赤	0.8 ∩ 1.44	0.5 ∩ 1.65	20-16	3号D 34号 DH-1B AC-5N-D	500
			BVYT1-3.5		BPYT1-3.5			3.7	6.5																						
			BVYT1-S4		BPYT1-S4		4.3	7.5																							
			BVYT1-4		BPYT1-4		8.0	9.0	15.5	19.5																					
			BVYT1-S5		BPYT1-S5		5.3																								
			BVYT1-5		BPYT1-5		11.5	10.0	20.2	24.7																					
			BVYT1-6		BPYT1-6		6.4	4.7 (4.5)	5.1	9.0	12.5	17.0	0.8	青	1.14 ∩ 1.82		1.04 ∩ 2.63	16-14	4号D 34号 DH-1B AC-5N-D	500											
			BVYT2-M3		BPYT2-M3		3.2														6.5										
			BVYT2-3		BPYT2-3		6.0														8.3	15.6	20.1								
			BVYT2-3.5M		BPYT2-3.5M		3.7														6.5	5.1	12.5	17.0							
			BVYT2-3.5		BPYT2-3.5		8.3														7.5	15.6	20.1								
			BVYT2-S4		BPYT2-S4		4.3																								
			BVYT2-4		BPYT2-4		8.5								16.5		21.0														
			BVYT2-5		BPYT2-5		5.3								12.0		11.5	21.7	26.2												
			BVYT2-6		BPYT2-6		6.4								6.4		8.8	13.5	19.5	26.7	1.0	黄	1.82 ∩ 2.89	2.63 ∩ 6.64	12-10		5号 DH-1B AC-5N-D	400			
			BVYT3-4		-		4.3																						9.5		
			BVYT3-5		-		5.3																						10.2	22.4	29.6
			BVYT3-6		-		6.4																								

1. 各呼びの印は、UL登録品、CSA登録品です。
2. UL登録品又はCSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA品用となります。
3. ( )はBPYT形の寸法です。