



# 裸圧着端子 B形 P形

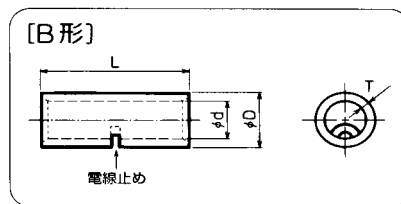

## 直線突合せ用スリーブ

呼び	在庫	各 部 の 寸 法				適 合 電 線 範 圍		適 合 工 具	一箱入数
		L	d	D	T	撚線mm <sup>2</sup>	AWG		
B-0.5		12.0	1.3	2.3	0.5	0.2 ~ 0.5	24-20	DS031, DH-1B, AC-5N-D	1,000
B-1.25		15.0	1.7	3.3	0.75	0.25 ~ 1.65	22-16	DS031, ㄟ12, 5N18, DH-1B, AC-5N-D	
B-2			2.3	4.1	0.8	1.04 ~ 2.63	16-14	ㄟ12, 5N18, 214A, DH-1B, AC-5N-D, REC-14	
B-5.5			3.4	5.4	1.0	2.63 ~ 6.64	12-10	5N18, 214A, DH-1B, AC-5N-D, REC-14	500
B-8		21.0	4.5	7.0	1.2	6.64 ~ 10.52	8	5N18, 214A, REC-14	300
B-14		26.0	5.8	8.9	1.5	10.52 ~ 16.78	6	214A, 9H-60, 9H-150, REC-14, REC-60F REC-150F, REC-1520*	200
B-22		29.0	7.7	11.3	1.8	16.78 ~ 26.66	4	9H-60, 9H-150, REC-60F	100
B-38		32.0	9.4	13.2		26.66 ~ 42.42	2	REC-150F, REC-1520*	50
B-60		36.0	11.4	15.3	2.0	42.42 ~ 60.57	1/0	9H-60, 9H-150, 12号H, 12号A, REC-60F REC-150F, REC-1520*	
B-70		37.0	13.3	17.5		60.57 ~ 76.28	2/0	9H-150, REC-150F, REC-1520*	
B-80		38.0	14.5	19.5	2.3	76.28 ~ 96.3	3/0	9H-150, 12号H, 12号A REC-150F, REC-1520*	10
B-100			16.4	22.1	2.6	96.3 ~ 117.2	4/0		
B-150		54.0	19.5	26.4	3.2	117.2 ~ 152.05	250-300MCM	12号H, 12号A, REC-1520*	8
B-180		57.0	21.0	28.5	3.5	152.05 ~ 192.6	300-350MCM		5
B-200		63.0	24.0	32.4	4.0	192.6 ~ 242.27	400MCM	12号H, 12号A	4
B-325		72.0	28.0	37.0	4.5	242.27 ~ 325	500-600MCM		

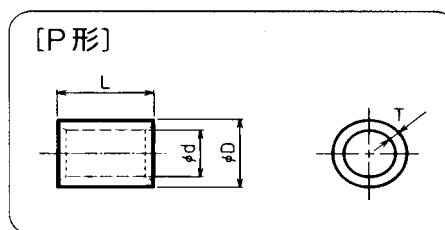

## 直線重ね合せ用スリーブ

呼び	在庫	各 部 の 寸 法				適 合 電 線 範 圍		適 合 工 具	一箱入数
		L	d	D	T	撚線mm <sup>2</sup>	AWG		
P-0.5		7.5	1.3	2.3	0.5	0.2 ~ 0.5	24-20	DS031, DH-1B, AC-5N-D	1,000
P-1.25		8.0	1.7	3.3	0.75	0.25 ~ 1.65	22-16	DS031, ㄟ12, 5N18, DH-1B, AC-5N-D	
P-2			2.3	4.1	0.8	1.04 ~ 2.63	16-14	ㄟ12, 5N18, 214A, DH-1B, AC-5N-D, REC-14	
P-5.5			3.4	5.4	1.0	2.63 ~ 6.64	12-10	5N18, 214A, DH-1B, AC-5N-D, REC-14	500
P-8		9.5	4.5	7.0	1.2	6.64 ~ 10.52	8	5N18, 214A, REC-14	400
P-14		11.0	5.8	8.9	1.5	10.52 ~ 16.78	6	214A, 9H-60, 9H-150, REC-14, REC-60F REC-150F, REC-1520*	200
P-22		13.5	7.7	11.3	1.8	16.78 ~ 26.66	4	9H-60, 9H-150, REC-60F	100
P-38		16.5	9.4	13.2		26.66 ~ 42.42	2	REC-150F, REC-1520*	
P-60		19.0	11.4	15.3	2.0	42.42 ~ 60.57	1/0	9H-60, 9H-150, 12号H, 12号A, REC-60F REC-150F, REC-1520*	50
P-70			13.3	17.5		60.57 ~ 76.28	2/0	9H-150, REC-150F, REC-1520*	
P-80		19.5	14.5	19.5	2.3	76.28 ~ 96.3	3/0	9H-150, 12号H, 12号A REC-150F, REC-1520*	25
P-100		20.0	16.4	22.1	2.6	96.3 ~ 117.2	4/0		
P-150		27.0	19.5	26.4	3.2	117.2 ~ 152.05	250-300MCM	12号H, 12号A	15
P-180		28.5	21.0	28.5	3.5	152.05 ~ 192.6	300-350MCM		10
P-200		32.0	24.0	32.4	4.0	192.6 ~ 242.27	400MCM	12号H, 12号A	8
P-325		37.0	28.0	37.0	4.5	242.27 ~ 325	500-600MCM		

1. 各呼びの 印は、JIS規格品、UL登録品、CSA登録品です。
2. UL登録品又はCSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA品用となります。
3. 上記寸法表にかぎらず特注品もご相談ください。
5. 適合工具欄のREC-1520\*は、REC-1520FH、REC-1520FMHの2機種があります。