



# 平形接続子 FS形 DSF形

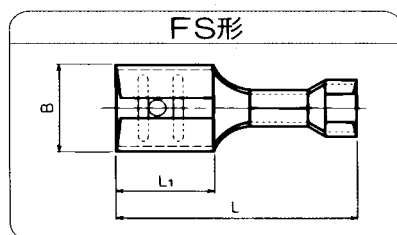

## 平形接続子 (FS形)

呼び	在庫	各部の寸法						適合タブ		適用電線範囲 mm <sup>2</sup>	形状	適合工具	一箱 入数
		B	L	L <sub>1</sub>	板厚	材質	表面処理	幅	厚さ				
FS2.8B-0.5-5		3.7	15.4	6.3	0.25	黄銅	すずめっき	2.8	0.5	0.2 ~ 0.5	バラ	FD2-05	2,000
FS2.8B-1.25-5	0.5 ~ 1.25											FD2-125	
FS4.8B-0.5-5	5.6	15.0	6.4	0.35	0.2 ~ 0.5			4.8	0.5	0.2 ~ 0.5		FD4-05	1,000
FS4.8B-1.25-5												0.5 ~ 1.25	
FS6.3B-0.75-8	7.7	19.0	7.7	0.4	0.3 ~ 0.75			6.3	0.8	0.3 ~ 0.75		FD6-075	500
FS6.3B-2.0-8												0.75 ~ 2.0	

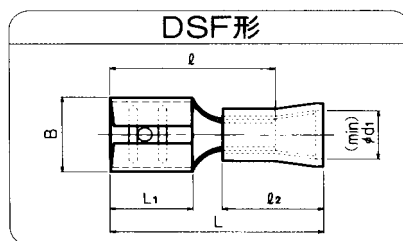

## 絶縁被覆付平形接続子 (銅スリーブ入) (DSF形)

呼び	在庫	各部の寸法						標準色	適合タブ		適用電線範囲 mm <sup>2</sup>	適合工具	一箱 入数
		B	d <sub>1</sub>	L <sub>1</sub>	ℓ <sub>2</sub>	ℓ	L		幅	厚さ			
DSF1.25-110		3.7	3.5	6.3	9.5	14.3	18.8	赤	2.8	0.5	0.75 ~ 1.65	3号D, 34号, 34S	500
DSF1.25-187	3.5												
DSF2-187		5.6	4.3	6.4	9.5	14.0	18.5	青	4.8	0.5	1.65 ~ 2.63	4号D, 34号, 34S	500
DSF1.25-250	3.5												
DSF2-250		7.7	4.3	7.7	9.5	15.7	20.2	青	6.3	0.8	1.65 ~ 2.63	4号D, 34号, 34S	500
DSF5.5-250	6.2		13.5										