
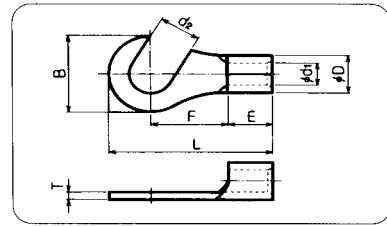


裸圧着端子（H形）




フック形端子

UL	SP	呼び	在庫	各部の寸法						適合電線範囲			適合工具	一箱入数		
				d ₂	B	L	F	E	D	d ₁	T	単線mm			撚線mm ²	AWG
		H1.25-3		3.2	5.5	13.8	6.6	4.5	3.4	1.7	0.8	0.57	0.25	22-16	DS031 ミニ12 5N18 DH-1B AC-5N-D	2,000
		H1.25-4		4.3	8.0	15.8	7.3									
		H1.25-5		5.3												
		H1.25-6		6.4	11.5	20.2	10.0					1.44	1.65			
		H2-3		3.2	8.0	16.8	8.3	4.5	4.2	2.3	0.8	1.14	1.04	16-14	ミニ12 5N18 214A DH-1B AC-5N-D REC-14	1,500
		H2-4		4.3	8.5											
		H2-5		5.3	9.5	17.7										
		H2-6		6.4	12.0	22.0										
		H2-8		8.4												
		H3.5-4		4.3	8.5	17.8	8.3	5.3	5.0	3.0	1.0	1.82~2.4	2.63~4.6	12	5N18 214A DH-1B AC-5N-D REC-14A	1,000
		H5.5-4		4.3	9.5	21.3	10.2	6.3	5.6	3.4	1.0	1.82	2.63	12-10		800
		H5.5-5		5.3												
		H5.5-6		6.4	12.0	25.8	13.5	2.89	6.64	500						
		H5.5-8		8.4	15.0	27.3										

- 各呼びの印は、UL登録品、CSA登録品です。
- UL登録品又はCSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA品用となります。

裸圧着端子（HY形）

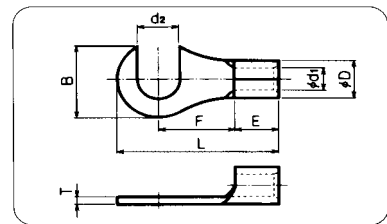

横開形端子

UL	SP	呼び	在庫	各部の寸法						適合電線範囲			適合工具	一箱入数		
				d ₂	B	L	F	E	D	d ₁	T	単線mm			撚線mm ²	AWG
		HY1.25-3		3.2	5.0	12.2	5.0	4.5	3.4	1.7	0.8	0.57	0.25	22-16	DS031 ミニ12, 5N18 DH-1B AC-5N-D	2,000
		HY1.25-4		4.3	7.2	15.8	7.3									
		HY1.25-5		5.3	7.0											
		HY2-4		4.3	7.8	17.0	8.3	4.5	4.2	2.3	0.8	1.14	1.04	16-14	ミニ12, 5N18 214A, DH-1B AC-5N-D, REC-14A	1,500
		HY2-5		5.3	8.7	17.5										
		HY8-6		6.4	11.0	23.8	9.5	8.3	7.1	4.5	1.2	2.89~3.65	6.64~10.52	8	5N18, 214A REC-14A	400

- 各呼びの印は、UL登録品、CSA登録品です。
- UL登録品又はCSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA品用となります。
- 上記寸法表にかぎらず特注品もご相談ください。