


銅線用裸圧着端子 <角形>

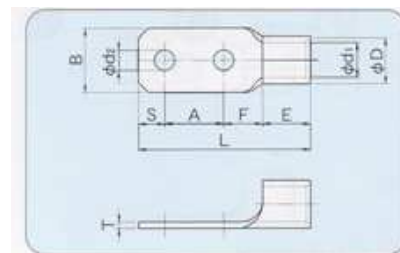

◆角形二ツ穴端子

RoHS指令対応品

呼び	各部の寸法										適合電線範囲			適合工具	一箱 入数
	ϕd_2	A	B	L	F	S	E	ϕD	ϕd_1	T	単線mm	燃線mm ²	AWG		
200-D-12	14.0	40.0	44.0	117.0	26.5	18.0	32.5	32.7	24.0	4.0	15.6	192.6	400 MCM	12号H 12号A REC-1520※	8
											17.5	242.27			
325-D-12	14.0	40.0	50.5	124.0	29.0	19.0	36.5	37.6	28.0	4.5	17.5	242.27	500-600 MCM	12号H 12号A	4
											20.3	325.0			