


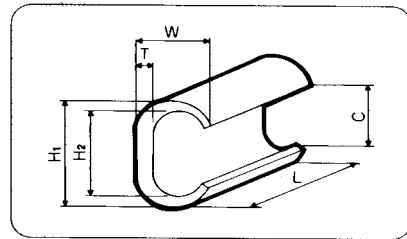


分岐接続用コネクター（T形）

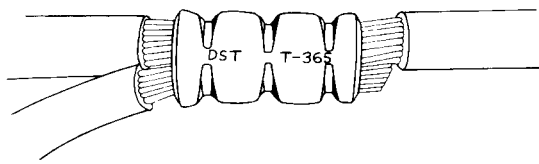

T形

呼び	在庫	各部の寸法						圧縮回数と位置		適用電線 合計断面積 (mm ²)	適合工具	一箱 入数
		H ₁	H ₂	W	L	T	C	回路	S			
T-11		9.5	6.3	6.2	12	1.6	4.0	2	6.0	7.5 ~ 11	EH-2C	500
T-16		11.8	7.8	7.8	13	2.0	5.0		7.0	11.5 ~ 16		300
T-20		12.8	8.6	9.7		2.9	5.1	1		14 ~ 20	200	
T-26		14.7	10.2	10.9	16	3.2	6.5			21 ~ 26	200	
T-44		19.0	13.4	14.4	20	4.0	8.5		27 ~ 44	100		
T-60		21.0	15.4	15.1	22				9.7	2	11.0	45 ~ 60
T-76		24.4	17.3	17.6	5.0	10.8	12.4	61 ~ 76	50			
T-98		27.5	20.5	19.2				25		12.4	2	12.0
T-122		29.8	22.1	21.2	26	5.5	13.5	99 ~ 122	REC-15F, 16号B EP-365, EP-520C	40		
T-154		34.0	25.7	24.4	28	6.0	17.0		8.5	123 ~ 154	16号B EP-365 EP-520C	30
T-190		37.0	28.5	25.4	35				17.4	10.5		155 ~ 190
T-240		40.0	30.2	28.5	40	7.0	19.0		13.0	191 ~ 240	EP-365 EP-520C	15
T-288		44.5	34.7	31.1	45				22.3	14.5		241 ~ 288
T-365		47.5	37.7	34.0	50	10.0	28.0		16.0	289 ~ 365	EP-520C	10
T-450		57.0	42.5	41.0	60				10.0	28.0		18.5
T-560		62.0	46.0	45.0	65	11.0	31.0		20.0	451 ~ 560	EP-520C	4
T-700		68.0	51.0	49.5	70				12.0	34.0		21.0