
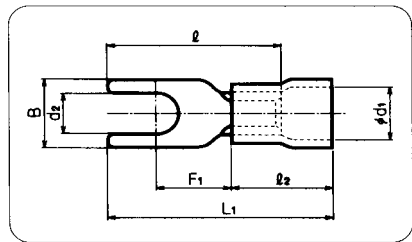


絶縁被覆付圧着端子 (BVF/BPF形)



角先開形端子 (拡管形)

呼 び	在 庫	呼 び	在 庫	各 部 の 寸 法								標 準 色	適 合 電 線 範 圍			適 合 工 具	一 箱 入 数			
				d ₂	B	d ₁	F ₁	l ₂	l	L ₁	板厚		単線mm	撚線mm ²	AWG					
BVF0.3-2		-		2.2	5.2		5.9		12.5	17.5										
BVF0.3-3		-		3.2																
BVF0.3-V3.5		-		3.7	5.7	3.2	7.7	9.0	15.0	20.2	0.65	黄	0.32 ∩ 0.6	0.1 ∩ 0.3	26-24	DS05N DH-1B AC-5N-D	1,000			
BVF0.3-L3.5		-	6.7																	
BVF0.3-3.5		-	7.7																	
BVF0.3-4		-	7.7																	
BVF0.5-2		-		2.2	5.2		5.9		12.5	17.5										
BVF0.5-3		-		3.2																
BVF0.5-V3.5		-		3.7	5.7	3.2	7.7	9.0	15.0	20.0	0.5	黄	0.6 ∩ 0.8	0.3 ∩ 0.5	22-20	DS05N DH-1B AC-5N-D	1,000			
BVF0.5-L3.5		-	6.7																	
BVF0.5-3.5		-	7.7																	
BVF0.5-4		-	7.7																	
BVF0.5-5		-		4.3	6.6		7.7													
BVF1.25-M3		BPF1.25-M3			5.6		5.0		14.2	18.7										
BVF1.25-3		BPF1.25-3		3.2	6.0		4.4													
BVF1.25-L3		BPF1.25-L3			5.9		6.5		15.6	20.1										
BVF1.25-C3.5		BPF1.25-C3.5			6.0		4.5		12.8	17.3										
BVF1.25-S3.5		BPF1.25-S3.5			5.7		6.3		13.5	18.0										
BVF1.25-3.5		BPF1.25-3.5		3.7	6.0	4.1 (4.0)	4.4	9.0	15.6	20.1	0.8	赤	0.8 ∩ 1.44	0.5 ∩ 1.65	20-16	3号D 34号 34S DH-1B AC-5N-D	500			
BVF1.25-V3.5		BPF1.25-V3.5					6.3													
BVF1.25-L3.5		BPF1.25-L3.5					4.4													
BVF1.25-A3.5		BPF1.25-A3.5					6.3													
BVF1.25-S4		BPF1.25-S4		4.3	7.0		6.8		15.6	20.1										
BVF1.25-4		BPF1.25-4					6.5													
BVF1.25-A4		BPF1.25-A4					7.1													
BVF1.25-5		BPF1.25-5					7.0													
BVF1.25-6		BPF1.25-6		5.3	8.0		7.0		16.8	21.3										
BVF2-3		BPF2-3		6.4	9.7		7.6		17.0	21.5										
BVF2-3		BPF2-3		3.2	5.5		4.4		14.2	18.7										
BVF2-S3.5		BPF2-S3.5		3.7	5.7		6.5		15.7	20.2										
BVF2-3.5		BPF2-3.5			6.5		6.0		15.8	20.3										
BVF2-M4		BPF2-M4			6.4		6.7		15.6	20.1										
BVF2-S4		BPF2-S4			6.6		8.0		15.8	20.3										
BVF2-4		BPF2-4		4.3	6.9	4.7 (4.5)	7.2	9.0	16.2	20.7	0.8	青	1.14 ∩ 1.82	1.04 ∩ 2.63	16-14	4号D 34号 34S DH-1B AC-5N-D	500			
BVF2-A4		BPF2-A4					8.3													
BVF2-5		BPF2-5					8.5													
BVF2-6		BPF2-6					9.5													
BVF3.5-4		-		4.3	8.0	6.0	7.5	13.5	17.8	26.0	1.0	黄	1.82 ∩ 2.4	2.63 ∩ 4.6	12			300		
BVF3.5-5		-		5.3																
BVF5.5-M4		-		4.3	7.1		7.9		19.5	26.7										
BVF5.5-4		-			8.5		7.2		18.0	25.2										
BVF5.5-5		-			5.3	9.0	6.4	8.5	13.5	19.0	26.2	1.0	黄	1.82 ∩ 2.89	2.63 ∩ 6.64	12-10	5号 DH-1B AC-5N-D	300		
BVF5.5-6		-			6.4	12.5		10.5		23.5	30.7									
BVF5.5-8		-		8.4	15.0				24.5	31.7								200		

- 各呼びの印は、UL登録品、CSA登録品です。
- UL登録品又はCSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA品用となります。
- 上記寸法表にかぎらず特注品もご相談ください。()はBPF形の寸法です。